
Easy user guide

1. The camera is connected with the installation diagram

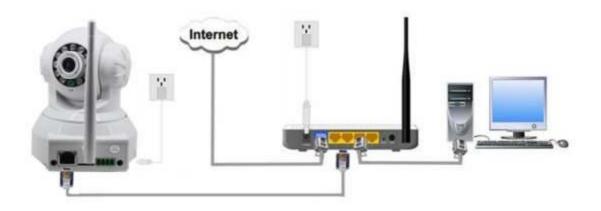

2 To the official web site http://down.54it.cn download search tool

Current Computer			Camera Information	English	~
Network Card:	192.168.1.156 ub Mask: 255.255.255.0 ateway: 192.168.1.1		General Others		
IP:					
Sub Mask:			Name: HTTP Port: Network:	IPCAM 80 Dynamic IP	
Gateway:					
Primary DNS:					
Secondary DNS:	202.96.128.86		IP :	192,168, 1,135	
Cameras			Sub Mask:	255 , 255 , 255 , 0	
Mode Name	IP	Port	Gateway:	192 168 1 1	
F V IPCAM	192.168.1.113 192.168.1.135	8002		OCustom OAuto	
			Primary-DINS:	202 96 134 33	
			Secondary DNS:	202 . 96 . 128 . 86	
			Inner access:	http://192.168.1.135	Open
			Outer access:	Chec	ik Open
Count:2		Export			

Rapid wireless connection

1 Open the page from search tool, input user name and password are admin into the

interface as shown below, choose to install the software (for the first time to enter the required) and then point to a computer to watch




2 Open the parameter settings, network settings, wireless setting certain points of search, find your router to determine the successful application to check the connection can be

Monitor Settings	1	
Media	1 Wireless	
Network 2	Enable Wireless:	© On C Off 4
Network	SSID:	HZD-WIFI (search)
Wireless 3 Ddns 3	Security mode:	WPA-PSK -
Platform	WPA Algorithm:	AES -
<u>ONVIE</u> <u>P2P</u>	Key:	
Alarm	Re-type key:	•••••
Advanced		
System	5	
		6
		(Apply) ⁶ Cancel
		California California

Card recording setting

Reminder: Insert TF card and pull out must turn off the power before TF, otherwise it will burn the TF Card

Equipment for maximum support 32GB, Fig. 1 video settings

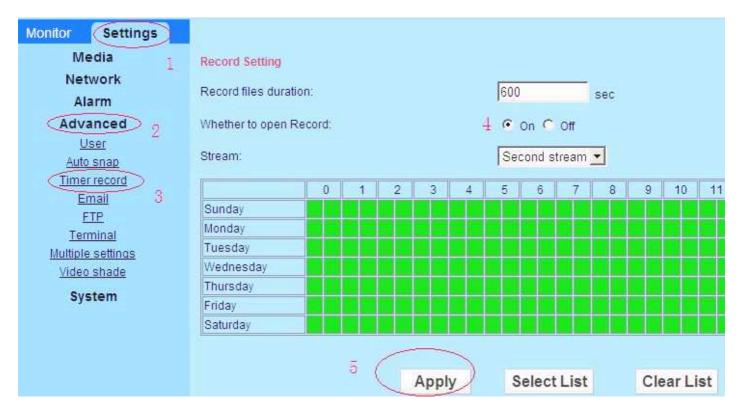

Fast connecting mobile phone

1 To the official website: two-dimensional code corresponding to the http://down.54it.cn scanning, The mobile phone client download to the corresponding mobile phone

Apple apple mobile phone to search market: The following camerap2p or scan two-dimensional code







² If can't scan can also choose to install the software corresponding to the corresponding mobile phone download click on

Reminder: Please visit the official website to download the need for detailed instructions more settings!

1: To the official web site: http://down.54it.cn download PC terminal software installation

2 : Click on: A the equipment list - open device UID search interface B to select
Search - double click search out- Confirmation

3 : Can automatically search equipment can also manually add--- The equipment list-The device name (fill in)--- The default username and password input device ID (admindevice base sticker) select OK

 $4~\mbox{Real}$ time when watching see according to the selection of the camera, and then drag

to the monitoring images can be viewed.

FAQ

1. Forget to do your login password?

The solution: There is a [RESET] button in the IP Camera backplane or interface line, in

the power on state, press and hold the button for 5 seconds or more, all parameters can be restored to the default value (factory value), the factory user name and password are admin.

2. IE browser without video image display how to do?

Possible reasons: a plugin is not installed

Solution: when the browser for the first time (Internet Explore) to access the IP Camera plugin to be installed. Installation method: access to the IP Camera address, click on the [control] pop-up download, file download dialog, select [run] or [save] to download. After the download is complete pop-up installation interface, automatically control installation, the installation is complete, the video image will be displayed

3. How to do IP Camera cannot be accessed through a IE browser?

1 The possible reasons : Solution:: machine with PC access network to test network

access is working correctly, first rule out cable fault, PC Network fault caused by a virus, until can use PC machine between Ping.

2 Possible reasons: IP address occupied by other equipment

Solution: disconnect the IP Camera and network, separately connect IP Camera and PC, re set the IP address in accordance with the recommendation of the appropriate operation.

3 Possible reasons: the IP address is on a different subnet

Solution: check the server's IP address and subnet mask address and gateway settings. 4 Possible reasons: network MAC address and IP Camera MAC values of charge process

5 Possible reasons: Web port is not correct

The solution: Web port by other equipment occupied, open the quick setup wizard network camera, change the device port

1 Possible reasons: no access audio input?

Solution: check the host audio connections

2 Possible reasons: IP Camera not open the corresponding channel audio options?

Solution: check IP Camera audio parameters, open the monitor function

Thank you for using the network camera, because of the difference between each model or system software upgrade resulting in appearance or function is different from the manual, please feel free to contact the manufacturer. For these changes I'm sorry we can not inform you.